

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



1 0000 000000 10 0000 0000 0000 0000 1 10 0000 0000 0000 0000 0000 0000 0000 0000

(43) International Publication Date
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number
WO 2005/007324 A1

(51) International Patent Classification⁷: **B22D 19/16**,
19/00, 21/04, F02F 1/00, F16J 10/04

[GB/US]; 772 Burroughs Street, Plymouth, MI 48170
(US).

(21) International Application Number:
PCT/AU2004/000949

(74) Agent: COLLISON & CO; 117 King William Street,
Adelaide, S.A. 5000 (AU).

(22) International Filing Date: 15 July 2004 (15.07.2004)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003903648 16 July 2003 (16.07.2003) AU

(71) Applicant (for all designated States except US): CASTAL-
LOY MANUFACTURING PTY LTD [AU/AU]; 76
Mooringe Avenue, North Plympton, SA 5037 (AU).


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventor; and

(75) Inventor/Applicant (for US only): BEND, Robert, J.

[Continued on next page]

(54) Title: CYLINDER LINER IMPROVEMENTS

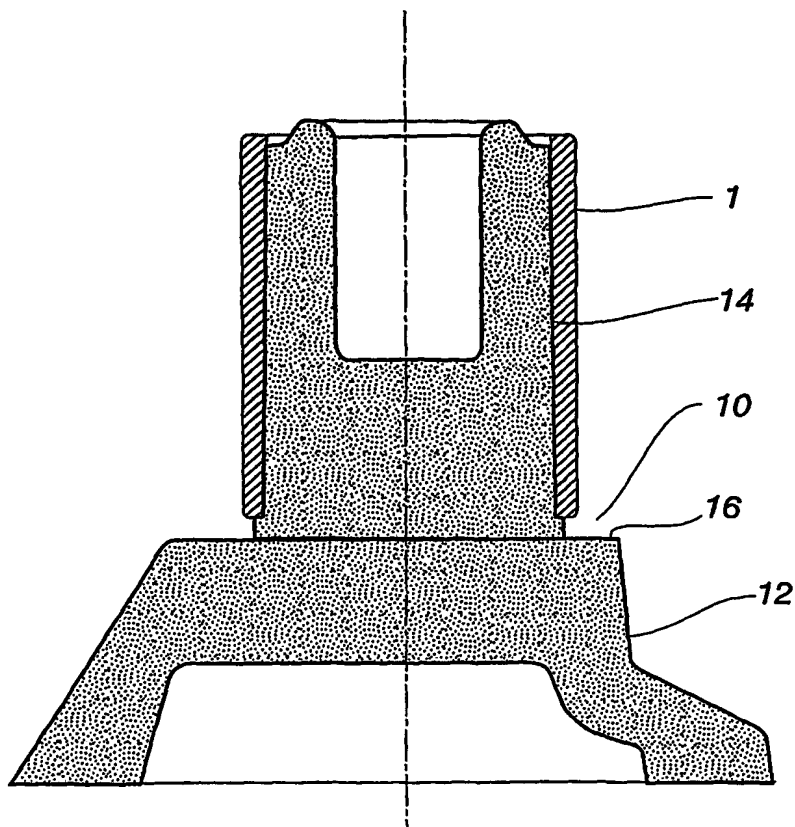

(57) Abstract: An engine block mold, including at least one barrel slab core (10), the or each barrel slab core (10) including a slab portion (12), and at least one barrel portion (14) adapted to receive a cylinder liner (1), wherein the barrel portion (14) of the or each barrel slab core (10) has an outer diametral taper along at least a portion of its length, and the or each liner (1) has a substantially matching internal diametral taper along at least a portion of its length. Inserting the or each slab barrel core (10) with the or each liner (1) disposed upon it, into a substantially completed mold casing, filling the mold, and then machining the cylinder liners (1) so that they have a substantially constant internal diameter along their length.

BEST AVAILABLE COPY

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

— with international search report